



ГЕНМОТОРС
з а в о д

ПРОИЗВОДСТВО. ИНЖИНИРИНГ. СЕРВИС.

Официальный представитель Caterpillar в России.
(343) 287-65-22; 8-800-775-75-61;
sales@energo-motors.com
www.energo-motors.com



DE16E3S

EU stage IIIA emissions compliant.
Suitable for Mobile Applications in the European Community.

Image shown may not reflect actual package

Output Ratings

Generator Set Model - 1 Phase	Prime*	Standby*
230V, 50Hz	15.0 kVA	16.5 kVA
	15.0 kW	16.5 kW
240/120V, 60 Hz	17.6 kVA	19.4 kVA
	17.6 kW	19.4 kW

* Refer to ratings definitions on page 4.
Ratings at 1.0 power factor.

Technical Data

Engine Make & Model:	Cat® C2.2	
Generator Model:	LCB1114M	
Control Panel:	EMCP 4.1	
Base Frame Type:	Heavy Duty Fabricated Steel	
Circuit Breaker Type:	3 Pole MCB	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Fuel Tank Capacity: litres (US gal)	66 (17.4)	
Fuel Consumption, Prime: l/hr (US gal/hr)	4.9 (1.3)	5.7 (1.5)
Fuel Consumption, Standby : l/hr (US gal/hr)	5.5 (1.5)	6.3 (1.7)

8-800-775-75-61

www.energo-motors.com



ГЕНМОТОРС
з а в о д

ПРОИЗВОДСТВО. ИНЖИНИРИНГ. СЕРВИС.

Официальный представитель Caterpillar в России.
(343) 287-65-22; 8-800-775-75-61;
sales@energo-motors.com
www.energo-motors.com

Physical Data

Manufacturer:	Caterpillar
Model:	C2.2
No. of Cylinders/Alignment:	4 / In Line
Cycle:	4 Stroke
Induction:	Naturally Aspirated
Cooling Method:	Water
Governing Type:	Mechanical
Governing Class:	ISO 8528
Compression Ratio:	23.3:1
Displacement: l (cu.in)	2.2 (135.2)
Bore/Stroke: mm (in)	84.0 (3.3)/100.0 (3.9)
Moment of Inertia: kg m² (lb. in²)	2.72 (9308)
Engine Electrical System:	
-Voltage/Ground:	12/Negative
-Battery Charger Amps:	65
Weight: kg (lb) - Dry:	242 (534)
- Wet:	251 (554)

Air System

	50 Hz	60 Hz
Air Filter Type:	Replaceable Element	
Combustion Air Flow:		
m ³ /min (cfm)		
-Standby:	1.5 (51)	1.7 (61)
-Prime:	1.5 (51)	1.7 (61)
Max. Combustion Air Intake		
Restriction: kPa (in H ₂ O)	3.0 (12.0)	3.0 (12.0)
Radiator Cooling Air Flow:		
m ³ /min (cfm)	33.0 (1165)	41.4 (1462)
External Restriction to		
Cooling Air Flow: Pa (in H ₂ O)	125 (0.5)	125 (0.5)

Cooling System

	50 Hz	60 Hz
Cooling System Capacity:		
l (US gal)	6.5 (1.7)	6.5 (1.7)
Water Pump Type:	Centrifugal	
Heat Rejected to Water & Lube Oil: kW (Btu/min)		
-Standby:	19.6 (1115)	22.2 (1262)
-Prime:	17.0 (967)	19.9 (1132)
Heat Radiation to Room: Heat radiated from engine and alternator		
kW (Btu/min)		
-Standby:	6.9 (392)	7.7 (438)
-Prime:	5.4 (307)	6.4 (364)
Radiator Fan Load: kW (hp)	0.2 (0.3)	0.4 (0.5)

Cooling system designed to operate in ambient conditions up to 50°C (122°F). Contact your local Cat dealer for power ratings at specific site conditions.

Lubrication System

Oil Filter Type:	Spin-On, Full Flow
Total Oil Capacity l (US gal):	10.6 (2.8)
Oil Pan l (US gal):	8.9 (2.4)
Oil Type:	API CH4 15W-40
Cooling Method:	N/A

Performance

	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Gross Engine Power: kW (hp)		
-Standby:	20.6 (28.0)	24.3 (33.0)
-Prime:	18.7 (25.0)	22.0 (30.0)
BMEP: kPa (psi)		
-Standby:	743.0 (107.8)	731.0 (106.0)
-Prime:	675.0 (97.9)	662.0 (96.0)
Regenerative Power: kW	5.6	7.2

Fuel System

Fuel Filter Type:	Replaceable Element			
Recommended Fuel:	Class A2 Diesel or BSEN590			
Fuel Consumption: l/hr (US gal/hr)				
	110% Load	100% Load	75% Load	50% Load
Prime				
50 Hz	5.5 (1.5)	4.9 (1.3)	3.7 (1.0)	2.7 (0.7)
60 Hz	6.3 (1.7)	5.7 (1.5)	4.4 (1.2)	3.3 (0.9)
Standby				
50 Hz	5.5 (1.5)	4.0 (1.1)	2.9 (0.8)	
60 Hz	6.3 (1.7)	4.8 (1.3)	3.5 (0.9)	

(based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)

Exhaust System

	50 Hz	60 Hz
Silencer Type:	Industrial	
Silencer Model & Quantity:	EXSY1 (1)	
Pressure Drop Across		
Silencer System: kPa (in Hg)	0.57 (0.168)	1.56 (0.461)
Silencer Noise Reduction		
Level: dB	18.7	11.5
Max. Allowable Back		
Pressure: kPa (in. Hg)	10.2 (3.0)	10.2 (3.0)
Exhaust Gas Flow:		
m ³ /min (cfm)		
-Standby:	3.9 (139)	4.8 (168)
-Prime:	3.6 (129)	4.3 (153)
Exhaust Gas Temperature: °C (°F)		
-Standby:	505 (941)	510 (950)
-Prime:	445 (833)	440 (824)



ГЕНМОТОРС
з а в о д

ПРОИЗВОДСТВО. ИНЖИНИРИНГ. СЕРВИС.

Официальный представитель Caterpillar в России.
(343) 287-65-22; 8-800-775-75-61;
sales@energo-motors.com
www.energo-motors.com

Generator Performance Data

Data Item	50 Hz				60 Hz			
	240V	230V	220V		220V/110V	240V/120V		
Motor Starting Capability* kVA	41	39	37		32	37		
Short Circuit Capacity %	-	-	-		-	-		
Reactances: Per Unit								
Xd	1.460	1.590	1.740		2.440	2.050		
X'd	0.210	0.230	0.250		0.360	0.300		
X''d	0.107	0.116	0.127		0.179	0.150		

Reactances shown are applicable to prime ratings.
*Based on 30% voltage dip at 0.9 power factor.

Generator Technical Data

Physical Data	
LC Series	
Model:	LCB1114M
No. of Bearings:	1
Insulation Class:	H
Winding Pitch - Code:	2/3 - M
Wires:	4
Ingress Protection Rating:	IP23
Excitation System:	SHUNT
AVR Model:	R220/R221

Operating Data	
Overspeed: RPM	2250
Voltage Regulation: (steady state)	+/- 1.0%
Wave Form NEMA = TIF:	100
Wave Form IEC = THF:	3.0%
Total Harmonic Content LL/LN:	5.0%
Radio Interference:	Suppression is in line with European Standard EN61000-6
Radiant Heat: kW (Btu/min)	
-50 Hz:	2.5 (142)
-60 Hz:	3.1 (176)



ГЕНМОТОРС
з а в о д

ПРОИЗВОДСТВО. ИНЖИНИРИНГ. СЕРВИС.

Официальный представитель Caterpillar в России.

(343) 287-65-22; 8-800-775-75-61;

sales@energo-motors.com

www.energo-motors.com



Voltage 50 Hz	Prime		Standby	
	kVA	kW	kVA	kW
240V	15.0	15.0	16.5	16.5
230V	15.0	15.0	16.5	16.5
220V	15.0	15.0	16.5	16.5

Voltage 60 Hz	Prime		Standby	
	kVA	kW	kVA	kW
220V/110V	16.5	16.5	18.2	18.2
240V/120V	17.6	17.6	19.4	19.4

Weights & Dimensions

Weights: kg (lb)	
Net (+ lube oil)	447 (985)
Wet (+ lube oil & coolant)	454 (1001)
Fuel, lube oil & coolant	510 (1124)

Dimensions: mm (in)	
Length	1500 (59.1)
Width	620 (24.4)
Height	1115 (43.9)

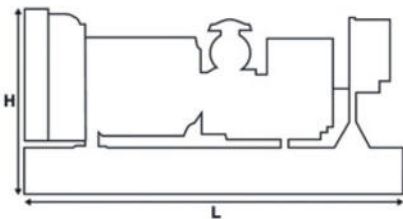

Note: General configuration not to be used for installation. See general dimension drawings for detail.

Definitions

Standby Rating

Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

Prime Rating

Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

General Data

Documents

A full set of operation and maintenance manuals and circuit wiring diagrams.

Quality Standards

The equipment meets the following standards: **IEC60034-1, IEC60034-22, ISO3046, ISO8528, NEMA MG 1-32, NEMA MG 1-33, 2004/108/EC, 2006/42/EC, 2006/95/EC.**

www.Cat-ElectricPower.com

© 2016 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

Price List: C1C2PGAI, C1C2PGAT

Gen. Arr. Number: 457-1403

Source: Europe, China

LEHE0685-01 (04/16)